SafetyOne.com™

PROUDLY MADE IN VIRGINIA-USA

ELITE ARCHITECTURAL Series Fire Extinguisher Cabinets

(Fire Rated)

116-EL-FSS

117-EL-SSF

128-EL

127-EL

126-EL-RD

127-EL-RD

Maintaining the Highest & Most Consistent Quality!

EL-ELITE ARCHITECTURAL Series Fire Extinguisher Cabinets (Fire Rated)

Detail & Submittal Sheet

Project:_____

Specification Reference:_____

Model Number:_____ Quantity: _____

Architect: _____

Contractor: _____

Distributor:_____

Approved By: _____

Date:_____

Construction Specifications:

ELITE (EL) safeguard fire-rated. Cabinet is 16 gauge cold rolled steel with 22 gauge cold rolled steel tubs. Fronts are baked white enamel. All cabinets come standard with chrome D handles and clear acrylic glazing.

To comply with ADA Guidelines, Extinguishers and Cabinets offer handles, brackets and turnbacks according to instructions provided by installer. For ADA compliance follow the specification ordering process dimensions in our catalog. Proper installation in accordance with the ADA Guidelines is the sole responsibility of the installer. For more information please visit the Accessibility Guidelines for Buildings and Facilities website or call them at 1-800-872-2253.

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet. Options at additional cost.

STEP 1: EXTINGUISHER SIZE:
5 - 5 lb. **1 -** 10 lb. **2 -** 20 lb.

STEP 2: CABINET STYLE:
0 - Surface Mounted **(S)**
1 - Semi-Recessed **(SR)**
2 - Fully-Recessed **(FR)**

STEP 3: DOOR STYLE:
6 - Full Glass **(FG)**
7 - Full Metal **(FM)**
8 - Vertical Duo **(VD)**

STEP 4: SERIES:
EL - Elite Architectural

STEP 5: CABINET TYPE:
SG - SAFEGUARD - Fire Rated

STEP 6: FINISH OPTIONS:
❑ **SSF -** Stainless Steel Front, #4 finish: 304 (standard) or 316*** (optional)
❑ **FSS -** Full Stainless Steel, #4 finish: 304 (standard) 316** (optional)
❑ **WH -** Baked White Enamel
❑ **RD -** Baked Red Enamel
❑ **BK -** Baked Black Enamel

STEP 7: HANDLE/ACCESSORY OPTIONS:
❑ **007 -** Chrome "D" Handle (Standard)
❑ **008 -** Chrome "D" Handle w/Safety Break Glass
❑ **010 -** Aluminum Die Cast Red "Fire" Handle
❑ **012 -** ADA "Recessed" Handle

STEP 8: GLAZING:
❑ **G11 -** Clear Acrylic (Standard)
❑ **G12 -** Clear Tempered Glass

STEP 9: LETTERING:
❑ **004 -** Decal "Fire Ext." Vertical *R/B*

Options

CHROME "D" HANDLE (STANDARD)

CHROME "D" HANDLE W/ SAFETY BREAK LOCK

DECAL - RED

ALUMINUM DIE CAST RED "FIRE" HANDLE

ADA "RECESSED" HANDLE

DECAL - BLACK

Installation Options:


Fully-Recessed Square (flat)
1/4" Turnback


Semi-Recessed
1 3/4" (5lb only)
Turnback


Semi-Recessed Radius
Semi-Recessed
2-1/2" Turnback 10lb,
3" Turnback 20lb
Note: See Murano Series for 3" (10lb) & 4" (20lb) Turnback

*** **316 SS** contains 2%-3% molybdenum, added to improve corrosion resistance to chlorides (like sea water).
304 SS has no molybdenum

NFPA MEMBER

Buy Online

Safeguard fire rated assembly

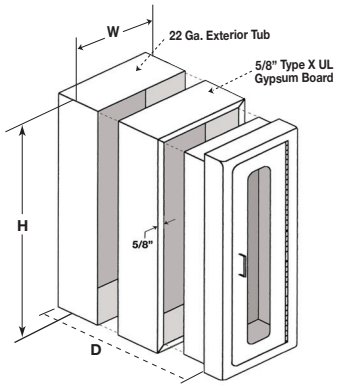

SAFEGUARD
Typical Semi-Recessed Fire Rated Installation

ONE HOUR FIRE WALL SYSTEM



TWO HOUR FIRE WALL SYSTEM



WARNOCK HERSEY LISTED

UL Classified 5/8" Type X gypsum board inserted in the cavity between the two layers. Warnock Hersey has approved the Safeguard Cabinets to be mounted in any face of fire rated steel or wood stud for up to 2 hour rated walls without affecting its fire rating. The above meets the requirement test ASTM-E119-98 with test report WHI-495-1534. MOUNTING INSTRUCTIONS are supplied with each Safeguard cabinet.

✔	Mod. #	Interior Tub Size			Overall Outside Trim		WARNOCK HERSEY LISTED SAFEGUARD Rough Opening			SAFEGUARD Turnback	Accom. Ext Size	♿
		W	H	D	W	H	W	H	D		Lbs.	
Semi-Recessed												
	516-EL-SG	8"	17"	5"	10 3/4"	19 3/4"	10"	19"	4 1/2"	1 3/4"	5	✔
	517-EL-SG	8"	17"	5"	10 3/4"	19 3/4"	10"	19"	4 1/2"	1 3/4"	5	✔
	518-EL-SG	8"	17"	5"	10 3/4"	19 3/4"	10"	19"	4 1/2"	1 3/4"	5	✔
	116-EL-SG	9 1/2"	24"	6"	13 1/2"	28 1/2"	11 1/4"	25 3/4"	4 1/2"	2 1/2" *	10	✔
	117-EL-SG	9 1/2"	24"	6"	13 1/2"	28 1/2"	11 1/4"	25 3/4"	4 1/2"	2 1/2" *	10	✔
	118-EL-SG	9 1/2"	24"	6"	13 1/2"	28 1/2"	11 1/4"	25 3/4"	4 1/2"	2 1/2" *	10	✔
	216-EL-SG	12"	27"	8"	16"	31"	13 1/2"	28 3/4"	5 3/4"	3" **	20	✔
	217-EL-SG	12"	27"	8"	16"	31"	13 1/2"	28 3/4"	5 3/4"	3" **	20	✔
	218-EL-SG	12"	27"	8"	16"	31"	13 1/2"	28 3/4"	5 3/4"	3" **	20	✔
Fully-Recessed												
	526-EL-SG	8"	17"	5"	12"	21"	10"	19"	6"	1/4"	5	✔
	527-EL-SG	8"	17"	5"	12"	21"	10"	19"	6"	1/4"	5	✔
	528-EL-SG	8"	17"	5"	12"	21"	10"	19"	6"	1/4"	5	✔
	126-EL-SG	9 1/2"	24"	6"	13 1/2"	28 1/2"	11 1/4"	25 3/4"	6 3/4"	1/4"	10	✔
	127-EL-SG	9 1/2"	24"	6"	13 1/2"	28 1/2"	11 1/4"	25 3/4"	6 3/4"	1/4"	10	✔
	128-EL-SG	9 1/2"	24"	6"	13 1/2"	28 1/2"	11 1/4"	25 3/4"	6 3/4"	1/4"	10	✔
	226-EL-SG	12"	27"	8"	16"	31"	14"	29 1/8"	8 3/4"	1/4"	20	✔
	227-EL-SG	12"	27"	8"	16"	31"	14"	29 1/8"	8 3/4"	1/4"	20	✔
	228-EL-SG	12"	27"	8"	16"	31"	14"	29 1/8"	8 3/4"	1/4"	20	✔

*** For 10lb 3" Turnback see Murano Series ** For 20lb 4" Turnback see Murano Series ✔ADA Compliant**

Revised 2-2024

MADE IN VIRGINIA-USA